


PLEXUS® CUSTOM-MADE PRODUCT

Customer: _____

Project: _____

Date: _____

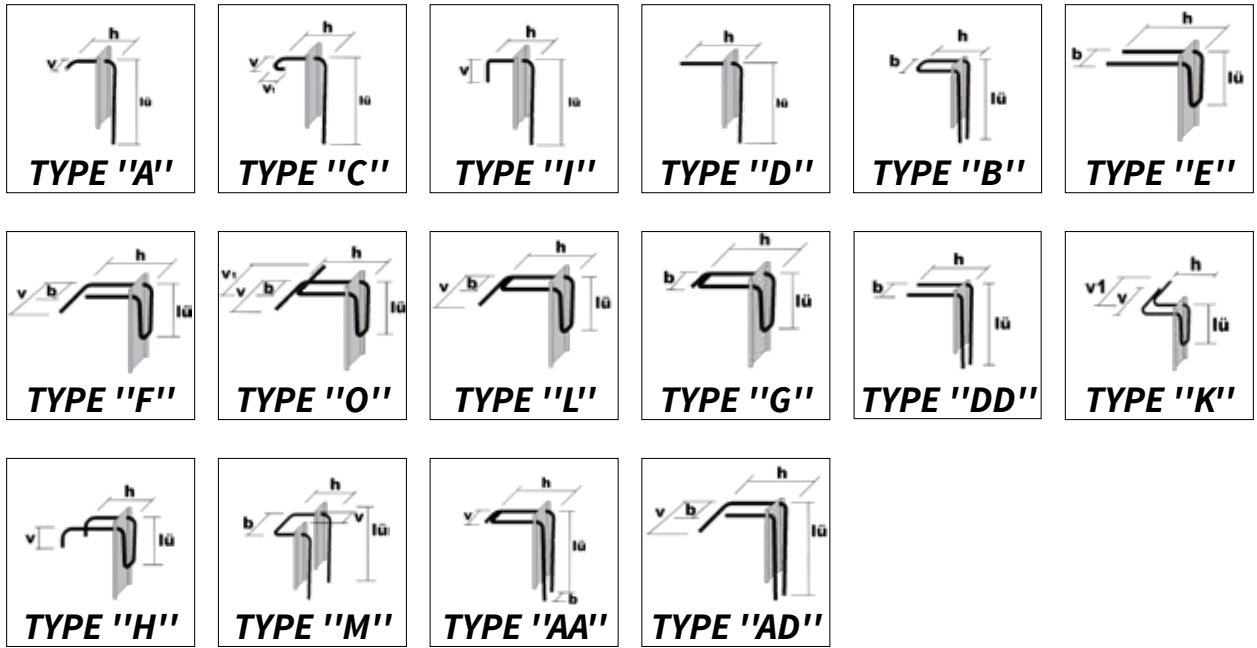

* Execution P / X / F	Piece	Type	Iron Ø (mm)	Stirrup distances (cm)	Stirrup width b (cm)	Stirrup height h (cm)	Pullout length lü (cm)	v / v1 (cm)	Box width (cm)	Length of element (cm)

* Execution: P = PLEXUS®, X = PYRAPLEX®, F = PLEXUS® for precast industrie

With the models "E", "F", "L", "G", "O", "K" und "H", the bracket height may vary by 1 to 2 cm. This can be prevented by using "position securing strips", which have to be ordered separately.