

## SCHALROHR NEVOTUBE® “SCHARFE KANTE“


Column formwork Nevotube®  
„with sharp angle“



Dimension mm	Outside Ø mm	Speed of casting m/h	Required amount of concrete approx. m³/m	Weight approx. kg/m
200x200	332	6	0,04	3,0
240x240	388	6	0,06	3,6
250x250	403	6	0,06	4,0
300x300	473	5	0,09	4,8
350x350	554	4	0,12	5,5
400x400	625	3	0,16	7,5
450x450	695	3	0,20	8,3
500x500	777	3	0,25	9,0
200x250	369	6	0,05	3,5
200x300	409	6	0,06	3,8
200x350	462	6	0,07	4,2
200x400	506	5	0,08	4,5
200x500	597	4	0,10	4,2
250x300	449	5	0,08	4,7
250x350	489	5	0,09	5,5
250x400	530	4	0,10	5,7
250x500	617	3	0,13	8,0
300x350	520	4	0,11	5,1
300x400	560	3	0,12	7,5
300x500	642	3	0,15	8,2
350x400	590	3	0,14	7,9
350x500	670	3	0,18	8,6
400x500	700	3	0,20	9,4

Perfect facing concrete! Other dimensions available on request.  
If self-compacting concrete is used, the casting speeds have to be halved.

Column formwork Nevotube®  
„oval“

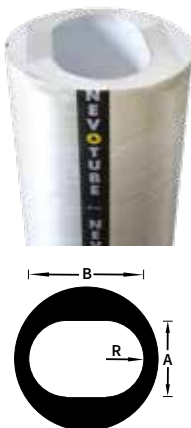

## SCHALROHR NEVOTUBE® “OVAL“

Dimension „A“ mm	Dimension „B“ mm	Radius „R“ mm	Outside Ø mm	Weight approx. kg/m
200	500	100	600	6,4
250	400	125	500	4,3
250	500	125	600	6,4
250	600	125	700	7,1
300	500	150	600	6,4
300	600	150	700	7,1
350	500	175	600	6,4
350	600	175	700	7,1
400	600	200	700	7,1

Perfect facing concrete! Other dimensions available on request.  
If self-compacting concrete is used, the casting speeds have to be halved.